

Secto Design Oy
Kauppalantie 12
02700 Kauniainen
Finland
tel. +358 9 5050598
fax +358 9 5475 2535
info@sectodesign.fi
www.sectodesign.fi

Secto Design



Atto 5000 pendant

natural birch, black laminate or white laminate, walnut veneer.


- The shade is made of form pressed birch slats
- White and black finishes have been laminated
- Walnut finish has a waxed walnut veneer on top
- Height of the shade 21 cm, diameter 34 cm, weight 1,9 kg
- The cable is a heat-resistant textile cable, standard length 180 cm, comes with a ceiling plug and a ceiling cup
- Light source (included): LED, 13 W, 3000 K, 800 lm, dimmable (trailing edge). Also available with 2700 K
- International Protection Rating: IP20
- Dimension of the box: 39 x 39 x 30 cm, 3 kg

Secto Design recommends the use of the following Trailing edge type of dimmers with the LED ATTO 5000:

Manufacturer	Dimmer	Note	Minimum LED-Load	Minimum Dim-range	Stability
BERKER	286710	Sam as Insta 51190	2.5 Watt	20%	OK
BERKER	-	Same as Insta 53128R	-	25%	NOT
BUSCH J	6513U-102		7.5 Watt	20%	OK
ELARI	ATD 315		2.5 Watt	20%	OK
ELARI	ADT 600R		7.5 Watt	20%	OK
EPV	PAB 315		2.5 Watt	20%	OK
GIRA	-	Same as Insta 51190	2.5 Watt	20%	OK
GIRA	-	Same as Insta 53128R	-	25%	NOT
INSTA	51190		2.5 Watt	20%	OK
INSTA	53128 R		-	25%	NOT
INSTA	FUNK 576650 22		10 Watt	30%	OK
INSTA	51040		2.5 Watt	20%	OK
JUNG	1254 UDE	Same as Insta 53128R	-	25%	NOT
JUNG	225TDE		2.5 Watt	20%	OK
LUTRON	LPRPM-4A		2.5 Watt	15%	OK
LUTRON	GRAFIK INTEGRAL GXI		2.5 Watt	15%	OK
OPUS	852395		2.5 Watt	30%	OK
PEHA	433HAB		2.5 Watt	20%	OK
SCHNEIDER	ATD 315		2.5 Watt	20%	OK
SCHNEIDER	600R		7.5 Watt	20%	OK
SIEMENS	5 TC8 284		7.5 Watt	15%	OK

(An overview of the Trailing-edge dimmers that are tested with the L05021 MINIDIM Driver)

20.08.2014 Secto Design Oy

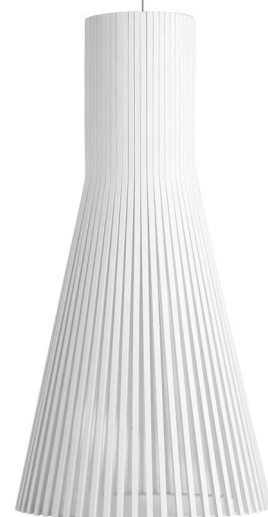

SECTO DESIGN ATTO 5000



This luminaire contains built-in LED lamps.

A⁺⁺

A⁺

A

~~B~~

~~C~~

~~D~~

~~E~~

} LED

The LED lamps cant be changed in the luminaire.

